



GRADED MATERIAL FOR PAVEMENT

Distribution: 1. K & J Baker Cartage
2. Lab File
3. W/S

Test Methods
Sampling by AS1141.3.1 Sect 9.3, RC(Vic)301.05
AS1141.11.1, Other methods as listed below.

REPORT No: B160724
Page No: 1 of 1
Issue No: 2

Client K & J Baker Cartage		Hwy/Municipality K & J Baker		Section/Road: Various	
Location: Various		Order/Job No:		Job Description: Material Investigation	
Laboratory Sample Number:		1			
Material Description:		Screen Quartz Gravel			
Origin:		Gre Gre Pit			
Sampled from:		Pit Stockpile			
SIEVE ANALYSIS PERCENT PASSING	75.0mm				
	53.0mm				
	37.5mm	100			
	26.5mm	99			
	19.0mm	95			
	13.2mm	90			
	9.5mm	83			
	4.75mm	70			
	2.36mm	65			
	0.425mm	45			
0.075mm	13				
Liquid Limit%(by AS1289.3.1.2):		25			
Plastic Limit%(by AS1289.3.2.1):		15			
Plasticity Index%(by AS1289.3.3.1):		10			
Linear Shrinkage%(by AS1289.3.4.1):		4.0			
Unsound Stone (%) (by AS1141.30)	Unsound				
	Total (U/S & Marg.)				


Unsound Reference Specimens	
Reference No.	Prepared By & Date

Preparation of Plasticity Tests
Air Dried & Dry Sieved

Remarks:

Sampled By: *Client*

Sample Date: *26th April 2016*

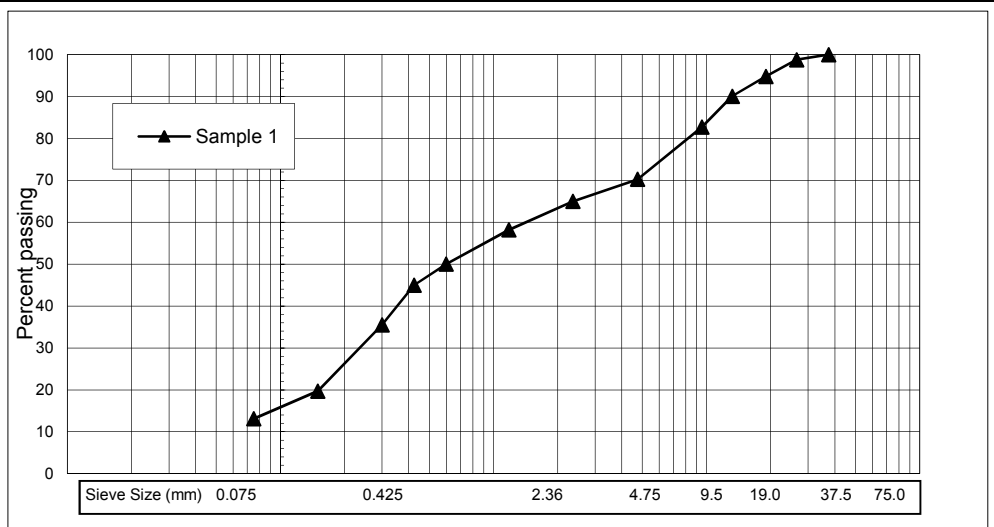

NATA Accredited Laboratory Number: 9760

Accredited for compliance with ISO/IEC 17025

B. McAdie

Approved Signatory

B. McAdie

3rd May 2016

Date

11/13paverpt.xls